




Features

- NANO-GEL technology;
- Highest starting currents
- Tolerant to deep discharging
- Extended service life
- Long shelf life
- Patented design of brass terminals
- Radial design of electrode arrays
- Heat-resistant housing

Battery design

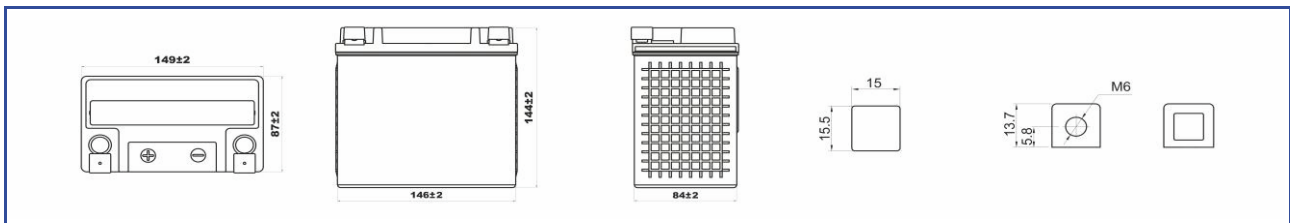

Specifications

Voltage.....12 V
 Charging current..... 1,4 A


Capacity			
10 hour discharge	1,4 A	10,5 V	14 Ah
C 2	4,2 A	9,6 V	8,4 Ah
C 1	7,2 A	9,6 V	7,22 Ah

CCA (-18 °C EN Standart).....240 A

Cycles (25°C)	100% discharge.....	300
	80% discharge.....	335
	50% discharge.....	650
Operating temperature range	Charge	-15°C to 60°C
	Discharge	-25°C to 60°C
	Storage	-35°C to 60°C

Dimensions (±2MM)

Length,MM.....149
 Width,MM..... 87
 Height,MM.....144
 Weight with acid,kg..... 4,6
 Polarity..... (+ -)

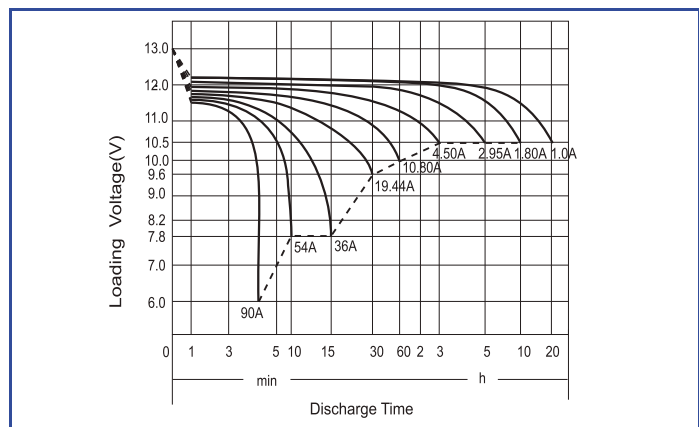

ASTERION EPS starter batteries conform to JIS / DIN / EN standards.

Recommended for use in motorbikes, scooters, jet skis, ATVs, UTVs, and gasoline and diesel generators.

The products are being updated on a continuous basis. Therefore the manufacturer reserves the right to make modifications without prior notice.