


STARTER BATTERIES FOR MOTOR VEHICLES



Features

- NANO-GEL technology;
- Highest starting currents
- Tolerant to deep discharging
- Extended service life
- Long shelf life
- Patented design of brass terminals
- Radial design of electrode arrays
- Heat-resistant housing

Battery design

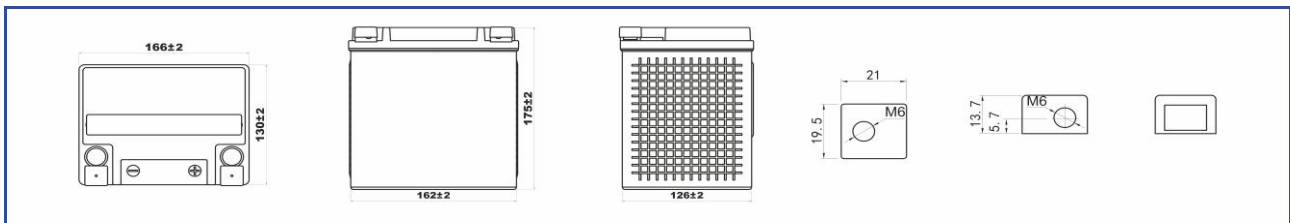

Specifications

Voltage.....12 V
Charging current.....3A


Capacity			
10 hour discharge	3 A	10,5 V	30 Ah
C 2	10,5 A	9,6 V	21Ah
C 1	18 A	9,6 V	18Ah

CCA (-18 °C EN Standart).....450 A

Cycles (25°C)	100% discharge.....	300
	80% discharge.....	335
	50% discharge.....	650
Operating temperature range	Charge	-15°C to 60°C
	Discharge	-25°C to 60°C
	Storage	-35°C to 60°C

Dimensions (±2MM)

Length,MM.....166
Width,MM.....130
Height,MM.....175
Weight with acid,kg.....10
Polarity.....reverse (- +)

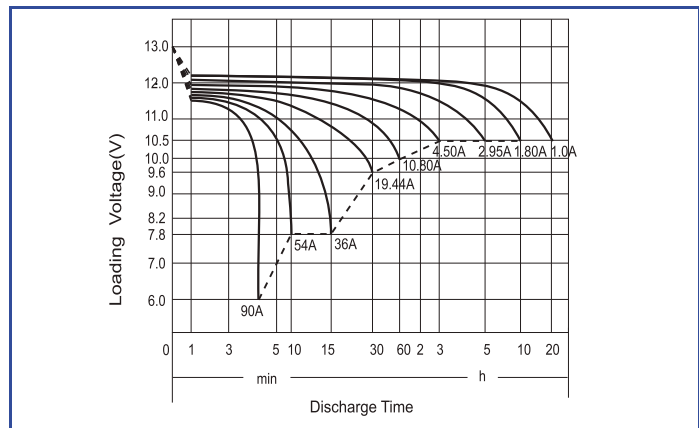

ASTERION EPS starter batteries conform to JIS / DIN / EN standards.

Recommended for use in motorbikes, scooters, jet skis, ATVs, UTVs, and gasoline and diesel generators.

The products are being updated on a continuous basis. Therefore the manufacturer reserves the right to make modifications without prior notice.