

CT 1209


STARTER BATTERIES FOR MOTOR VEHICLES



Features

- AGM technology: sealed, maintenance-free, no distillate top-up required
- Calcium-doped lead plates ensure high power density
- Low internal resistance, high discharge characteristics
- High starting power
- Increased vibration resistance, shockproof and frost-resistant housing
- Long service life

Battery design

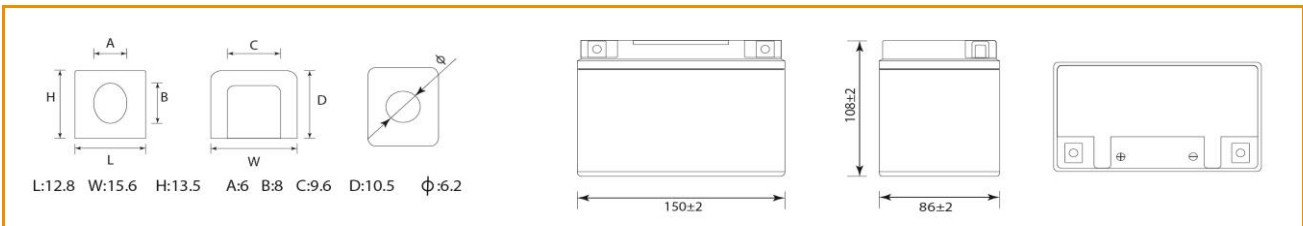

Specifications

Voltage..... 12 V

Capacity			
10 hour discharge	0,9 A	10,5 V	9 Ah
27 minute discharge	9 A	9,6 V	4,05 Ah
7 minute discharge	27 A	9,6 V	3,15 Ah

Charging current..... 0,8 A

Battery local action.....2% per month


Cycles (25°C)
 100% discharge.....200
 80% discharge.....225
 50% discharge.....500

	JISD (-10°C)	Manufacturer standard (-18°C)
Discharge current	80 A	135 A
Voltage (5 s)	9,7 V	-
EOD voltage	6 V	7,2 V
Discharge time	1min 54 sec	≥ 30 sec

Dimensions (± 2 mm)

Length, mm..... 150
 Width, mm..... 86
 Height, mm..... 108
 Weight with acid, kg..... 3.03

Discharge characteristics (25 °C)

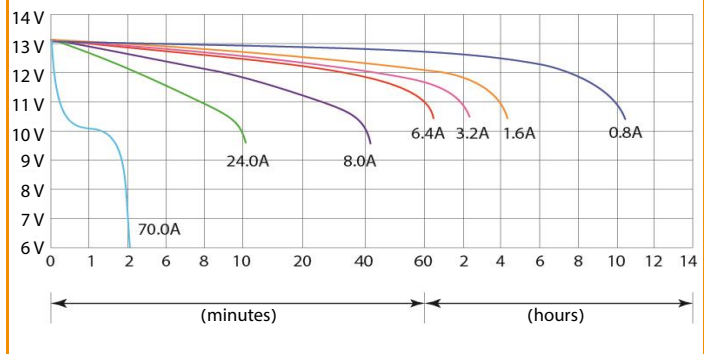

ASTERION CT starter batteries conform to JIS / DIN / EN standards.

Recommended for use in motorbikes, scooters, jet skis, ATVs, UTVs, and gasoline and diesel generators.

Commonly used dimensions of ASTERION CT starter batteries are suitable for all well-known motor brands.

The products are being updated on a continuous basis. Therefore the manufacturer reserves the right to make modifications without prior notice.