

# CT 1214


## STARTER BATTERIES FOR MOTOR VEHICLES



### Features

- AGM technology: sealed, maintenance-free, no distillate top-up required
- Calcium-doped lead plates ensure high power density
- Low internal resistance, high discharge characteristics
- High starting power
- Increased vibration resistance, shockproof and frost-resistant housing
- Long service life

### Battery design

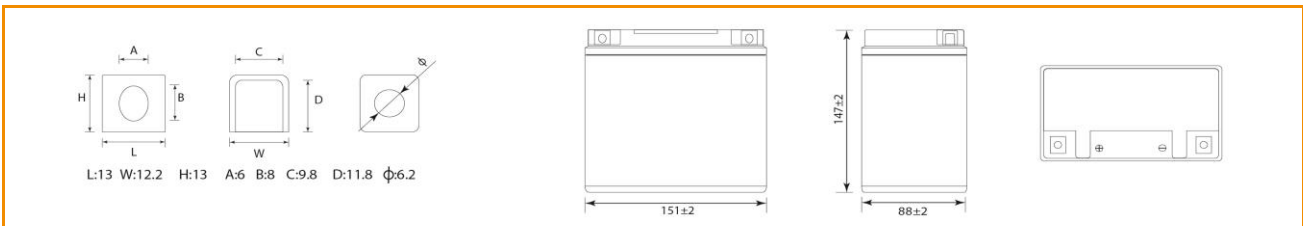

### Specifications

Voltage..... 12 V

Capacity			
10 hour discharge	1,4 A	10,5 V	14 Ah
27 minute discharge	14 A	9,6 V	6,3 Ah
7 minute discharge	42 A	9,6 V	4,9 Ah

Charging current..... 1.4 A

Battery local action.....2% per month


Cycles (25°C)  
 100% discharge.....200  
 80% discharge.....225  
 50% discharge.....500

	JISD (-10°C)	Manufacturer standard (-18°C)
Discharge current	115 A	200 A
Voltage (5 s)	9,6 V	-
EOD voltage	6 V	7,2 V
Discharge time	2 min 12 sec	≥ 30 sec

### Dimensions (± 2 mm)

Length, mm..... 151  
 Width, mm.....88  
 Height, mm..... 147  
 Weight with acid, kg.....4.72

### Discharge characteristics (25 °C)

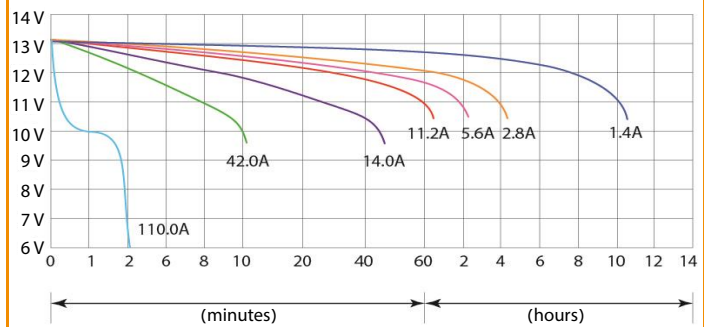

ASTERION CT starter batteries conform to JIS / DIN / EN standards.

Recommended for use in motorbikes, scooters, jet skis, ATVs, UTVs, and gasoline and diesel generators.

Commonly used dimensions of ASTERION CT starter batteries are suitable for all well-known motor brands.

The products are being updated on a continuous basis. Therefore the manufacturer reserves the right to make modifications without prior notice.