


STARTER BATTERIES FOR MOTOR VEHICLES



Features

- NANO-GEL technology;
- Highest starting currents
- Tolerant to deep discharging
- Extended service life
- Long shelf life
- Heat-resistant housing

Battery design

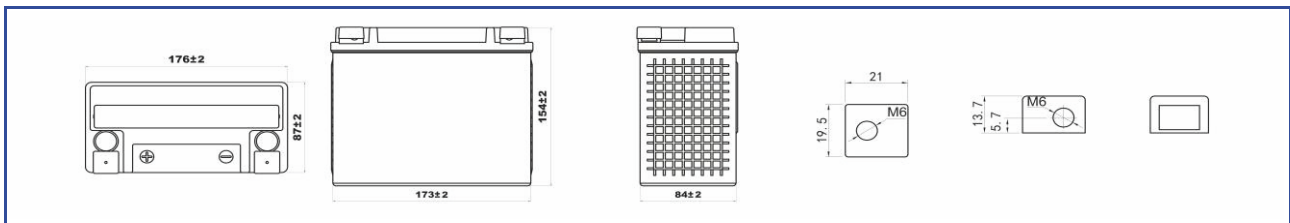

Specifications

Voltage.....12 V
 Charging current.....2 A


Capacity			
10 hour discharge	1,8 A	10,5 V	18 Ah
C 2	6,3 A	9,6 V	12,6 Ah
C 1	10,8 A	9,6 V	10,8 Ah

CCA (-18 °C EN Standart).....245 A

Cycles (25°C)	100% discharge.....	200
	80% discharge.....	225
	50% discharge.....	500
Operating temperature range	Charge	-15°C to 60°C
	Discharge	-25°C to 60°C
	Storage	-35°C to 60°C

Dimensions (±2MM)

Length,MM.....176
 Width,MM.....87
 Height,MM.....154
 Weight with acid,kg.....5,62
 Polarity.....(+ -)

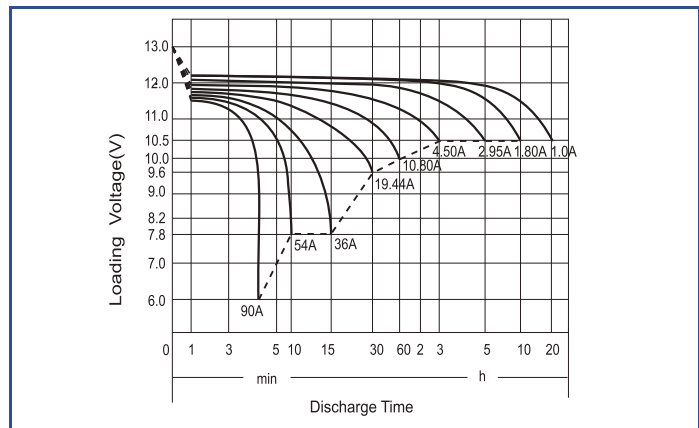

ASTERION EPS starter batteries conform to JIS / DIN / EN standards.

Recommended for use in motorbikes, scooters, jet skis, ATVs, UTVs, and gasoline and diesel generators.

The products are being updated on a continuous basis. Therefore the manufacturer reserves the right to make modifications without prior notice.