

ASTERION HRL-X are sealed maintenance-free lead-acid batteries with gas recombination system (VRLA). Are manufactured by AGM technology (electrolyte absorbed in glass fiber separators).

Thanks to the use of modern technologies in production, batteries demonstrate high operation stability and highest quality. HR refers to a range of ASTERION UPS series, specifically designed for use in UPS Data Centers, communication systems and other equipment. The series is highly reliable and has a service-life up to 12 years.



### Battery construction

Element	Positive plate	Negative plate	Case	Lid	Valve	Terminal	Separator	Electrolyte
Material	Lead dioxide	Lead	ABS		Rubber	Copper	Fiberglass	Acid

### Specifications

Nominal voltage.....	12 V
Cell.....	6
Design life.....	10-12 years
Nominal capacity (25°C)	
10 hours rate (1,8 A; 1,8 V/cell).....	18 Ah
5 hours rate (3,4 A; 1,75 V/cell).....	17 Ah
1 hours rate (13,3 A; 1,65 V/cell).....	13,3 Ah
Self-discharge.....	3% capacity per month 20°C
Internal resistance (25°C).....	15 mΩ

### Operating temperature range

Discharge.....	-20+60°C
Charge.....	-10+60°C
Storage.....	-20+60°C
Maximum dischrge current (25°C).....	230A (5sec)
Cycle mode (2,35÷2,4 V/cell)	
Max.charge current.....	5,4 A
Temperature correction factor.....	30 mV/°C
Standby mode (2,27÷2,3 V/cell)	
Temperature correction factor.....	20 mV/°C

### Application


- Uninterruptable power supply
- Back up power supply
- Communication system
- Power engineering facilities
- Renewable energy systems

### Performance & characteristics

- AGM technology allows to recombine 99% of the generated gas;
- No restrictions on air transportation;
- Compliance with the UL requirements;
- Lead plates, alloyed by calcium, provide high energy density;
- Maintenance-free. Do not require distillate topping;
- Long service life;
- The battery case is made of flame-retardant ABS plastic.

### Dimensions (±2mm)

Length, mm.....	181
Width, mm.....	77
Height, mm.....	167
Height over terminals, mm.....	167
Weight (±3%), kg.....	6,2

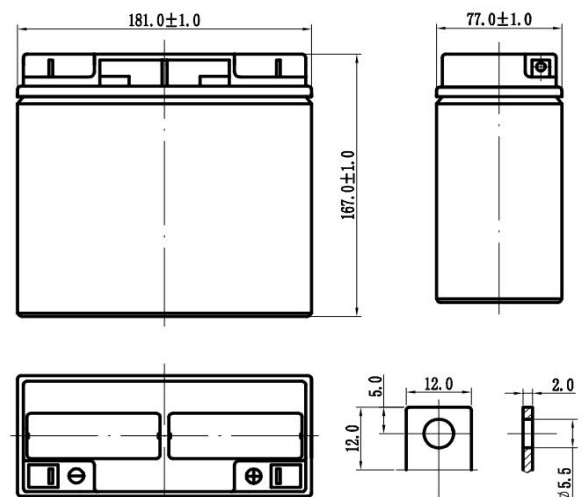


### Layout

E



### Terminal type

Fasten 5,5mm







**Discharge Constant Current, A ( 25°C)**

V/cell	5 min	10 min	15 min	30 min	45 min	1 h	3 h	5 h	10 h
1,60	75,6	51,4	39,8	22,5	16,0	13,4	5,36	3,59	1,84
1,65	73,2	50,1	38,7	22,1	15,7	13,3	5,32	3,56	1,83
1,70	71,7	48,9	38,0	21,7	15,4	13,1	5,23	3,50	1,82
1,75	70,1	47,7	37,2	21,4	15,1	12,8	5,13	3,43	1,81
1,80	68,3	46,3	36,0	21,1	14,9	12,6	5,05	3,38	1,80

**Discharge Constant Power, W/cell ( 25°C)**

V/cell	5 min	10 min	15 min	30 min	45 min	1 h	3 h	5 h	10 h
1,60	150	104	84,8	45,6	31,6	27,1	10,6	7,11	3,71
1,65	145	102	82,6	44,3	31,1	26,8	10,5	7,05	3,74
1,70	142	101	80,2	43,9	30,4	26,4	10,4	6,94	3,70
1,75	139	97,2	78,4	43,2	30,0	26,3	10,1	6,82	3,56
1,80	135	95,3	77,3	42,5	29,5	25,9	10,00	6,81	3,48

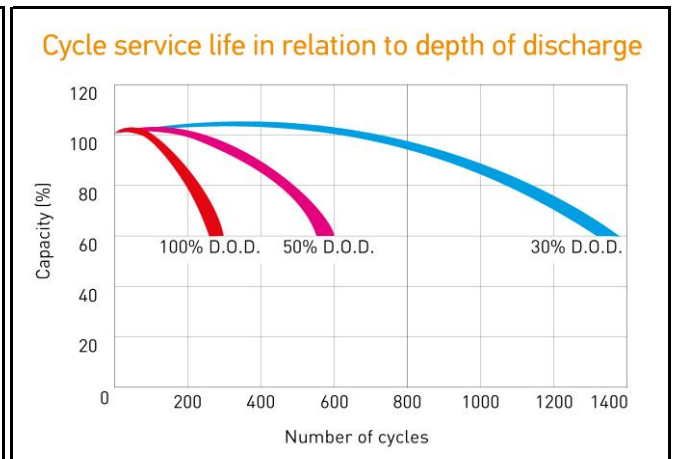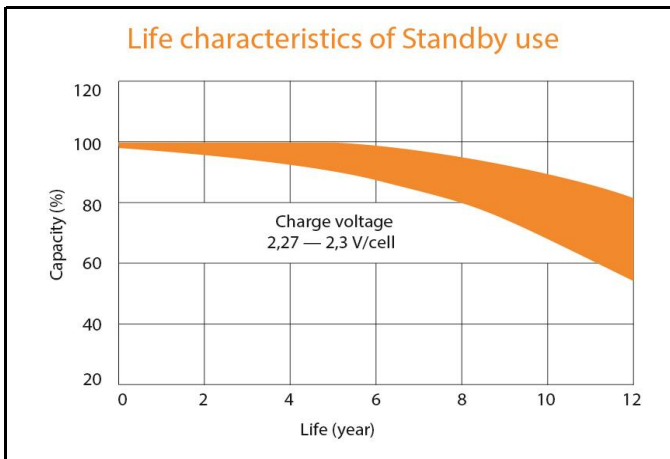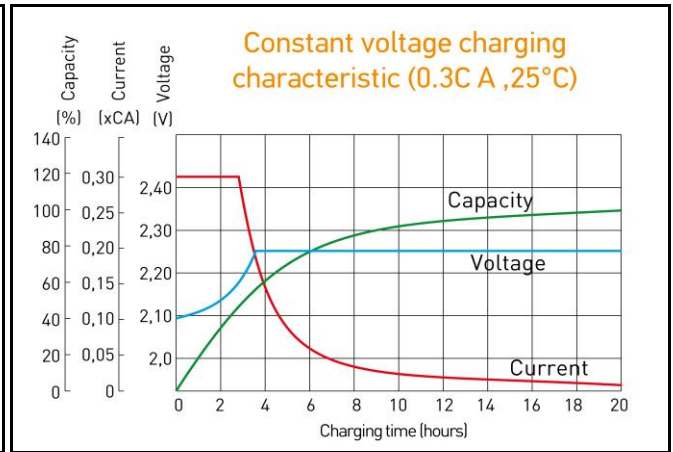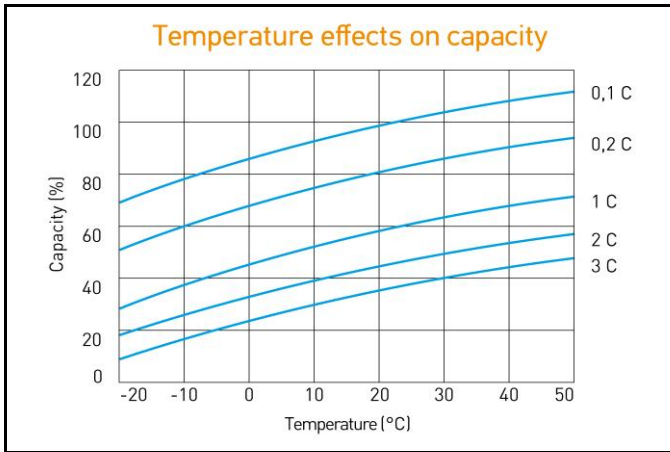

ALL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE