

CT 1216


STARTER BATTERIES FOR MOTOR VEHICLES



Features

- AGM technology: sealed, maintenance-free, no distillate top-up required
- Calcium-doped lead plates ensure high power density
- Low internal resistance, high discharge characteristics
- High starting power
- Increased vibration resistance, shockproof and frost-resistant housing
- Long service life

Battery design

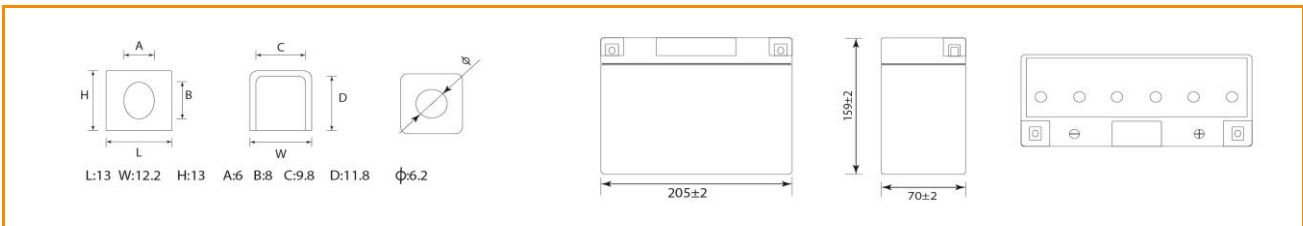

Specifications

Voltage..... 12 V

Capacity			
10 hour discharge	1,6 A	10,5 V	-
27 minute discharge	16 A	9,6 V	-
7 minute discharge	48 A	9,6 V	-

Charging current..... 1.6 A

Battery local action.....2% per month


Cycles (25°C)
 100% discharge.....200
 80% discharge.....225
 50% discharge.....500

	JISD (-10°C)	Manufacturer standard (-18°C)
Discharge current	135 A	200 A
Voltage (5 s)	9,3 V	-
EOD voltage	6 V	7,2 V
Discharge time	1min 35sec	≥ 30 sec

Dimensions (± 2 mm)

Length, mm..... 205
 Width, mm.....70
 Height, mm..... 162
 Weight with acid, kg.....6.09

Discharge characteristics (25 °C)

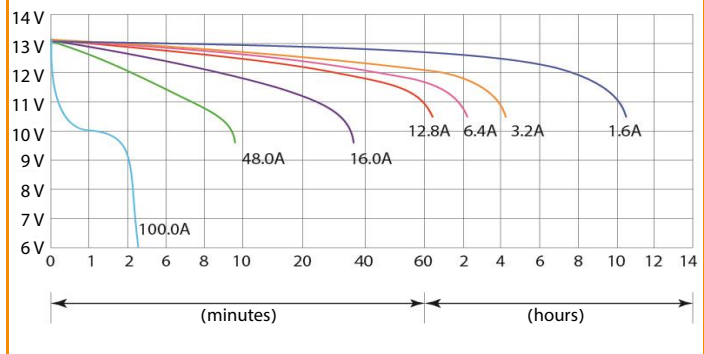

The products are being updated on a continuous basis. Therefore the manufacturer reserves the right to make modifications without prior notice.

ASTERIONCT starter batteries conform to JIS / DIN / EN standards.

Recommended for use in motorbikes, scooters, jet skis, ATVs, UTVs, and gasoline and diesel generators.