

CT 1230


STARTER BATTERIES FOR MOTOR VEHICLES



Features

- AGM technology: sealed, maintenance-free, no distillate top-up required
- Calcium-doped lead plates ensure high power density
- Low internal resistance, high discharge characteristics
- High starting power
- Increased vibration resistance, shockproof and frost-resistant housing
- Long service life

Battery design

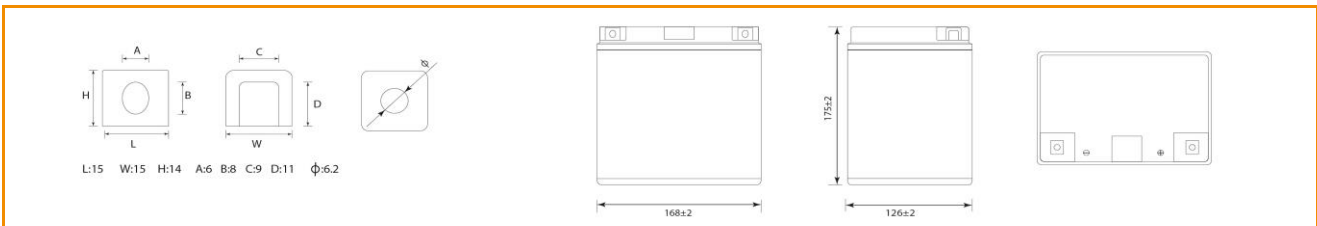

Specifications

Voltage..... 12 V

Capacity			
10 hour discharge	3 A	10,5 V	30 Ah
27 minute discharge	30 A	9,6 V	13,5 Ah
7 minute discharge	90 A	9,6 V	10,5 Ah

Charging current..... 3 A

Battery local action.....2% per month


Cycles (25°C)
 100% discharge.....200
 80% discharge.....225
 50% discharge.....500

	JISD (-10°C)	Manufacturer standard (-18°C)
Discharge current	240 A	300 A
Voltage (5 s)	9,3 V	-
EOD voltage	6 V	7,2V
Discharge time	1 min 30 sec	≥ 30 sec

Dimensions (± 2 mm)

Length, mm..... 168
 Width, mm.....126
 Height, mm..... 175
 Weight with acid, kg.....8.57
 Polarity..... reserve(- +)

Discharge characteristics (25 °C)

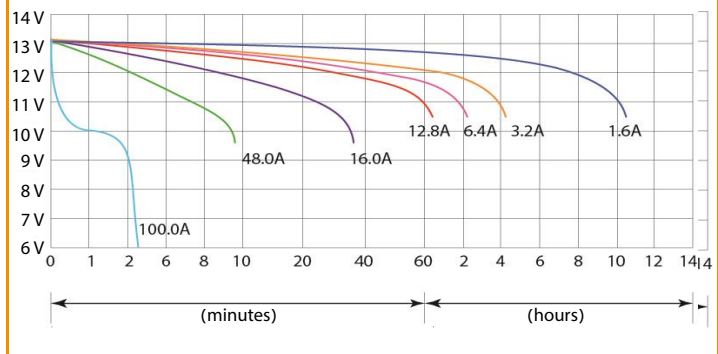

The products are being updated on a continuous basis. Therefore the manufacturer reserves the right to make modifications without prior notice.

ASTERION CT starter batteries conform to JIS / DIN / EN standards.

Recommended for use in motorbikes, scooters, jet skis, ATVs, UTVs, and gasoline and diesel generators.